



HANSA



www.hansa.com

MODEL

HANSAELECTRA

REF. NO.

00880010

DESCRIPTION

Electronic washbasin tap,
DN 15 battery-operated
sensory operation (infrared)
as wall-mounted spout
flow rate: 6 l/min,
at 3 bar hydraulic pressure


- Fitting body: brass
- for cold or pre-tempered water only
- sensor parameters at factory optimally preset
- adjustable electronic function
 - forced flushing 12/24/47/72 hours (factory setting: off)
 - recognition range
- CARE® flow straightener M24 x 1, laminar
- thief-proof
- spout can be removed without an inner body
- integrated shut-off valve with strainer

projection: 225 mm

spout: fix, cast

FINISH

Brass Chrome Plated

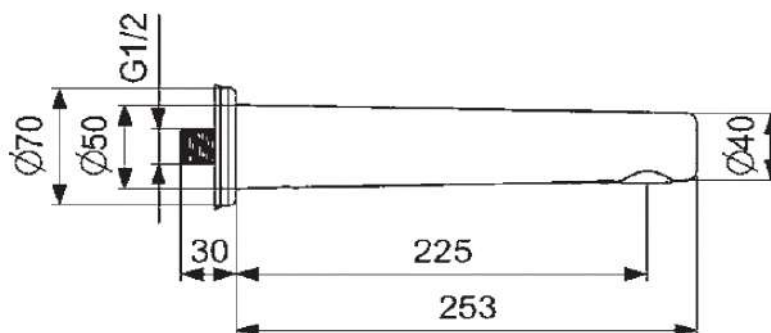

*Battery not included.
Recommended battery :*



2 x 1.5 V Lithium batteries (LR91/FR6/AA)

