

HANSAPRIMO

BIDET FAUCET

49433203

EAN: 4015474254015



- Bathroom
- Single lever, top operated
- Chrome
- PCA® - constant flow rate regardless of pressure fluctuations, Ball joint, HONEYCOMB® - improved lime protection
- Hot/Cold symbols, Single operating lever/handle
- Pop-up waste with draw-rod
- 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- body made of DZR brass

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)

6.0 l/min

Technical properties

DN-size (nominal dimension)
Hot water supply
Working pressure
Connection size

DN15
max. +90°C
0.5-10 bar
G3/8

Regulations


EN standard


EN 817

Type approvals


DVGW
KIWA
ABP
CSTB
ACS

NW-6506CN0242
K6116/06
P-IX 28938/IA
322-M1-19/1
16 ACC NY 205

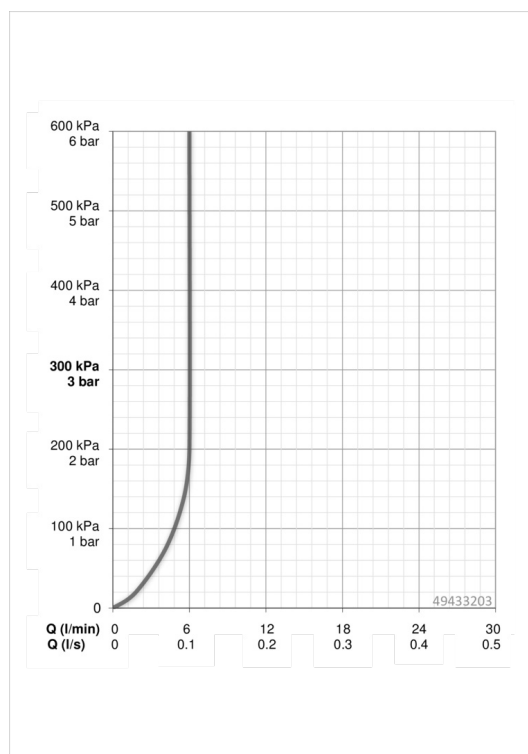

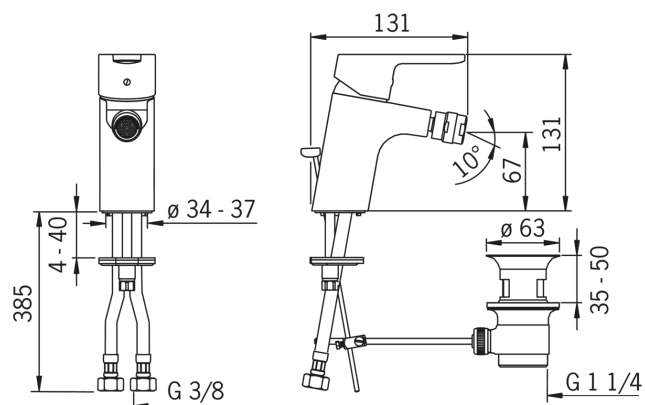

Spare parts

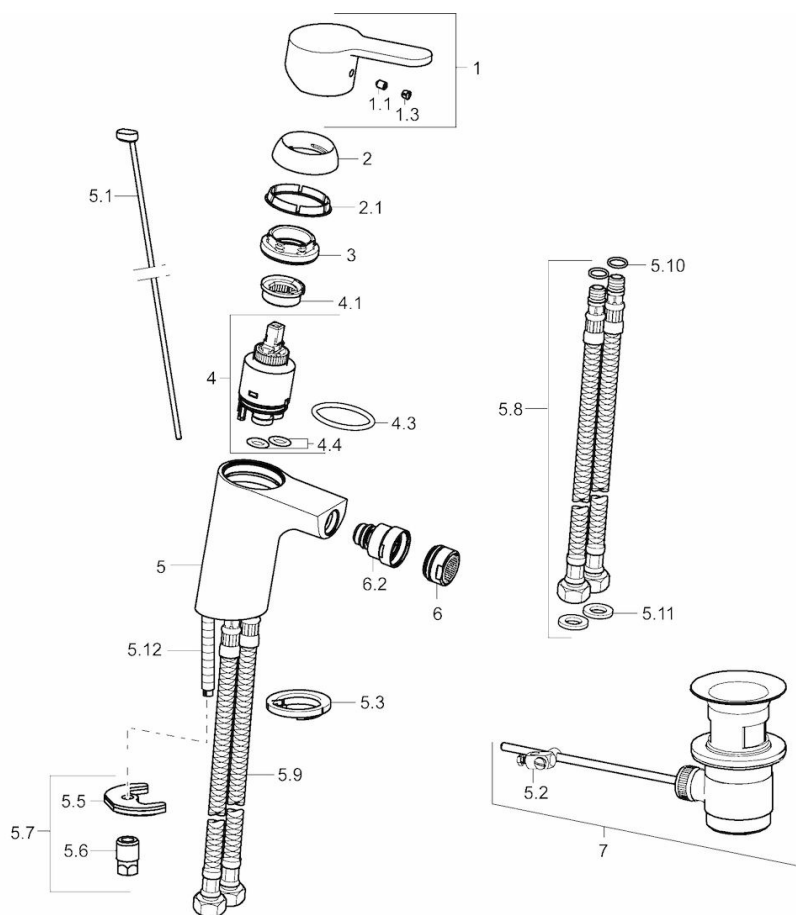

SP49433203

Name	Code
1 Lever	59913827
1.1 Screw, M5x8, SW2,5	59904755
1.3 Symbol plug Grey	59912112
2 Covering cap, 33 x 3 mm	59912504
2.1 Gasket, 45x35.5x5.4	59913651
3 Tightening nut, M40x1, SW30	59913210
4 Cartridge, 3.5 Eco	59912324
4 Cartridge, 3.5 Classic	59913075
4.1 Temperature adjustment limiter	59912325
4.3 O-ring, d 28,24x2,62	59912590
4.4 O-ring, d 10.10 x d 1.60	59905072
5.1 Pop-up operating rod	59913067
5.10 O-ring, d 7,65 x d 1,78	59902337
5.11 Gasket, 9.5 x 14.4 x 2	59912551
5.12 Fixing screw, M8x1, L=140	59912474
5.2 Swivel joint	59904624
5.3 Bottom seal	59913653
5.5 Fixing plate	59904765
5.6 Screw, M8x1, SW13	59904766
5.7 Fixing set	59912113
5.8 Flexible pipe	59913213
5.9 Flexible pipe, L=430, G3/8-M10x1	59912515
6 Aerator, M24x1, 6 l/min	59913727
6.2 Ball joint for bidet faucet	59910952
7 Pop-up waste	59904620
N.I. Key, SW 30/34	59912108